

## LA808i-II with LA880i-II PRODUCT SPECIFICATIONS

System Type	LA880i-II plus LA808i-II for extended low-frequency directivity control
Impedance (Rated) <sup>1</sup>	4 Ω
Sensitivity dB @ 2.83 V / 1 M	90 dB
Sensitivity dB @ 1 W / 1 M <sup>2</sup>	87 dB
Frequency Response (±3 dB) <sup>3</sup>	65 Hz - 22 kHz
Frequency Response (±10 dB) <sup>3</sup>	50 Hz - 22 kHz
Max. Program Power <sup>4</sup>	500 W
Max. Continuous Power <sup>5</sup>	300 W
Max. SPL dB @ 1 M <sup>6</sup>	113 dB
Coverage Angle (±6 dB @ 2 kHz)	104° Horizontal   30° Vertical
Coverage Angle (±6 dB @ 10 kHz)	77° Horizontal   51° Vertical
Coverage Angle (Avg. 2-10 kHz)	91° Horizontal   52° Vertical (200-10 K)
Directivity Factor (Q)	6.9
Directivity Index (DI)	9.2 dB
Low-Frequency Driver	8 - 102mm (4.5") woofers, paper with rubber surround
Mid-Frequency Driver	8 - 51 mm (2") midrange, paper with foam surround
High-Frequency Driver	63.5 mm (2.5") planar magnetic ribbon tweeter
Low-Frequency Voice Coil	25.4 mm   1"
Crossover Frequency	500 Hz
Network Type: Low Pass	12 dB/Oct
Network Type: High Pass	12 dB/Oct
Enclosure Material	Painted MDF and aluminum
Grille	Powder-coated steel
Inputs	4-pin, 5.08 mm Euroblock or SpeakOn for individual or daisy chain connection
Height (LA808i-II + LA880i-II)	2082.8 mm   81"
Width	192.1 mm   7.5625"
Depth (Including Bracket)	273.1 mm   10.75 "
Weight (LA880i-II)	24.95 kg   55 lbs
Weight (LA808i-II)	22.68 kg   50 lbs
Included Accessories (LA808i-II + LA880i-II)	2 Bent back brackets, 2 safety cables, 2 Euroblock connectors, jumper cable, 2 link plates
Optional Accessories	AC-LA8-BACK, AC-LA8-LINK-II, AC-LA8-FLY-II, plus a variety of mounting brackets
Certifications	CE, RoHS

## Description

NOT a subwoofer, the SoundTube LA808i-II is designed to increase the directivity of low frequencies in SoundTube's Line Array system. It can be used only in conjunction with the LA880i-II 3-way line array. The use of the LA808i-II is recommended in spaces that have a large reverberation time. When a single unit is added to the LA880i-II, directivity of low frequencies is increased by up to an octave lower than with the LA880i-II alone.

The product's dimensions are identical to those of the LA880i-II. The LA808i-II must be placed either directly above or directly below the LA880i-II in order for the system to work properly. If desired, two LA808i-II units can be added: one above the LA880i-II and one below.



## Features

- Passive, fixed length, low-frequency directivity element for SoundTube line array.
- Designed for use only with LA880i-II line array.
- Eight 4.5" (114 mm) woofers
- Extends low-frequency directivity of line array systems by up to an octave lower than with the LA880i-II alone.
- Paintable enclosure is constructed of MDF and aluminum with metal threaded mounting points.
- Powder-coated, paintable steel grille.
- Available in black or white paint finish..
- Flexible mounting options include surface-mount, pole-mount, ceiling-mount or suspended (flown). (Adaptive Technologies mounting accessories sold separately).
- Euroblock and SpeakOn connectors allow for fast connections and easy daisy chaining.
- Included accessories: safety cable mounting plate and mounting bolts, Euroblock connector, safety cable.
- NOTE: Mounting brackets not included.

<sup>1</sup> Impedance listed per IEC 60268-5

<sup>2</sup> 1 W/1 M sensitivity determined using nominal impedance

<sup>3</sup> Frequency response measured in half or full space as dictated by speaker mounting configuration

<sup>4</sup> Max program power is 3 dB above max continuous power

<sup>5</sup> Continuous power rating, EIA-426-B test

<sup>6</sup> Max output based on max continuous power

## Applications

In combination with the 3-way LA880i-II, the LA808i-II LFDE is ideal for PA and sound reinforcement applications. The system's near-field to far-field transition occurs at only 3 meters (about 10') from the speakers, maintaining a constant directivity of 40 x 120° throughout the coverage area. The LA880i-II and LA808i-II were designed for use in transportation platforms, airports, houses of worship, auditoriums, and other public gathering spaces.

The LA880i-II and LA808i-II are not weatherized and are intended only for indoor applications.

## Patented Technologies

SoundTube Entertainment and the MSE Audio Group constantly develop new technologies which enhance audio product performance. SoundTube Entertainment innovations are protected by multiple U.S. and international patents, which explicitly cover SoundTube dome, enclosure and dispersion technologies. The MSE Audio Group actively defends its patents in order to protect SoundTube resellers and end-users.

## Technical Data and Specification Tools

SoundTube Entertainment strives to provide complete and effective technical information and data to dealers, engineers and designers. All data is available at [www.mseaudio.com](http://www.mseaudio.com).

Technical data and downloads include:

- EASE™ data - 3-D polar plots.
- EASE™ Address - 2-D modeling for distributed systems
- AutoDesk® Revit® software
- Tech Sheets - technical information and architectural specs for system engineers
- SoundTubeSPEC™ - Proprietary speaker placement software

## Independent Data Acquisition and Verification

All data for SoundTube speakers is independently collected from and verified by NWAALabs ([www.nwaalabs.com](http://www.nwaalabs.com)) using their proprietary MACH testing system. All data is collected and analyzed according to ASTM, ISO and AES standards using EASERA, TEF and MLSSA. Full balloon data including both phase and magnitude is compiled into a variety of formats including EASE 4.x, GLL and CLF.

## Architectural Specifications

The loudspeaker shall be used to enhance the low-frequency directivity of a single cabinet 3-way line array. It shall consist of a single cabinet with eight 4.5" (115 mm) woofers. The cabinet shall be the same size as the cabinet housing the 3-way line array.

In tandem with the 3-way line array, the performance specifications of a typical production LFDE unit shall be as follows: usable frequency response shall extend from 65 Hz - 22 kHz ( $\pm 10$  dB). Measured sensitivity (ref. 2.83 V / 1 M) shall be 90 dB. The speaker shall have a rated impedance of 4  $\Omega$ . Rated power handling shall be 500 W and maximum continuous output at 1 meter shall be 113 dB.

The eight low-frequency drivers shall include a treated paper cone and butyl rubber surround. They shall use a die cast aluminum basket and a ferrite motor structure. The midrange drivers shall include a treated paper dome with pressed foam surround. They shall use a die cast aluminum basket with a neodymium motor structure. The high-frequency driver shall be a planar magnetics (ribbon) unit with a neodymium motor structure.

Mounting points for wall mount, pole mount, ceiling mount or suspension via cables shall be provided. Mounting hardware shall be Adaptive Technologies or equivalent. Input connectors shall include a four-position terminal block and Neutrik SpeakOn. The four-position terminal block shall accept from 10 - 22-gauge wire. A jumper cable shall be provided to connect the LFDE unit to the 3-way line array. Built-in low-frequency equalization shall automatically be applied to both the LFDE unit and 3-way line array when the two units are properly connected together using the jumper cable.

The enclosure shall be constructed of MDF and aluminum with metal 0.25" x 20 threaded insert mounting points and a steel grille. The enclosure and grille shall be available in black or white textured paint, and shall also be paintable by the installer. A bent back plate with plate mounting hardware and safety cable attachment point shall be included. Speaker mounting brackets and hardware shall be available for use with 3rd party manufacturer mounting systems.

The system shall be the SoundTube LA808i-II Low-Frequency Directivity Element in conjunction with the SoundTube LA880i-II line array.

## SoundTube®


13720 W. 109th St.  
Lenexa, KS 66215  
Phone: 913.663.5600  
Fax: 913.663.3200  
Toll Free: 855.663.5600  
[www.mseaudio.com](http://www.mseaudio.com)

All SoundTube speakers come with a 5-year limited warranty and 3-year warranty on all electronics.

# SOUNDTUBE LA808i-II with LA880i-II

Line Array Speaker

## Mechanical Drawings

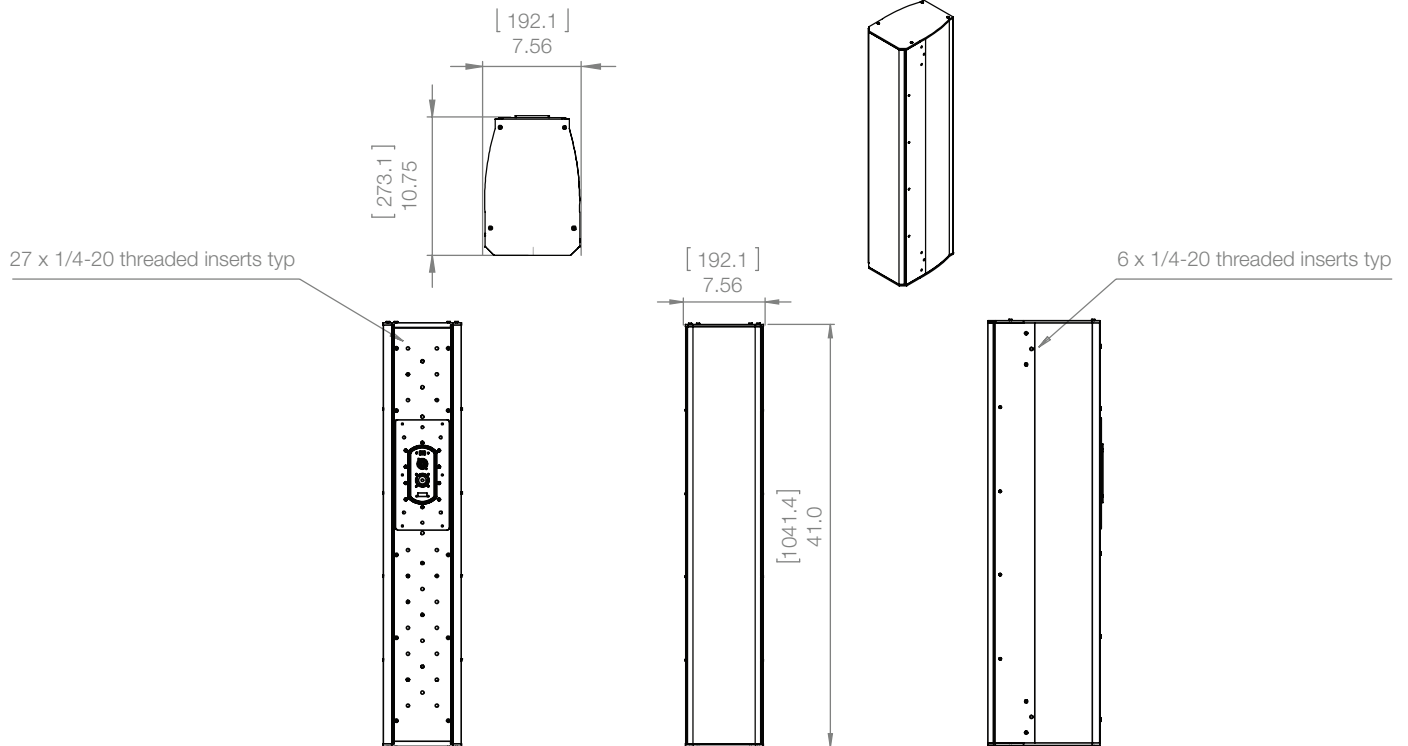

## Accessories


	<p><b>AC-LA8-BACK-BK</b> Bent back plate for LA8 series. Use for safety tie-off, or secondary mounting. Includes 1 bracket and 3 mounting screws. Black only. Comes with LA880i-II and LA808i-II. This can also be sold separately.</p>	<p><b>ST-MM-020X</b> Adaptive Technologies ceiling mount bracket kit. Use to hang LA8 system from a secure ceiling. Black only.</p>	<p><b>ST-TCK-010</b> Adaptive Technologies fly cable kit. Use with ST-1WA-20 and AC-LA8-FLY to suspend LA8 system from above. Only experienced rigging professionals should install the LA8 in a flown configuration. Available in black.</p>
	<p><b>AC-LA8-LINK-II-BK/WH</b> Side and back connector plates for LA8 series. Use to link 2 LA8 cabinets, or other top or bottom mount accessories. Includes 2 side brackets, 1 back bracket, and 18 mounting screws. Available in black or white. Comes with LA808i and can also be sold separately.</p>	<p><b>ST-MM-120HD</b> Heavy duty Adaptive Technologies pan and tilt surface mount bracket kit. Weight rated up to 120lbs. Use to support up to 2 LA8 cabinets. Black only.</p>	<p><b>ST-TCK-010-S</b> Adaptive Technologies fly cable kit. Use with ST-1WA-20 and AC-LA8-FLY to suspend LA8 system from above. Only experienced rigging professionals should install the LA8 in a flown configuration. Available in silver.</p>
	<p><b>AC-LA8-FLY-II-BK/WH</b> Top mounted fly point plates for LA8 series. Use to add 2 fly points to the LA8 cabinets. Includes 2 brackets and 6 mounting screws. Available in black or white.</p>	<p><b>ST-SAS-1WA-20</b> Adaptive Technologies fly bracket. Use with AC-LA8-FLY and ST-TCK-101 to suspend LA8 system from above. Only experienced rigging professionals should install the LA8 in a flown configuration. Black only.</p>	<p><b>ST-TCK-010-S</b> Adaptive Technologies fly cable kit. Use with ST-1WA-20 and AC-LA8-FLY to suspend LA8 system from above. Only experienced rigging professionals should install the LA8 in a flown configuration. Available in silver.</p>
	<p><b>ST-MM-024</b> Adaptive Technologies pan and tilt surface mount bracket kit. Weight rated for up to 60lbs. Only use with single LA8 cabinet. For multiple cabinets, use ST-MM-120HD. Black only.</p>	<p><b>AC-RS-HH-10</b> LA series safety cable kit - 10' safety cable, 2 SpeedClamps &amp; fasteners. Comes with LA880i-II and LA808i-II. This can also be sold separately.</p>	<p><b>ST-TCK-010-S</b> Adaptive Technologies fly cable kit. Use with ST-1WA-20 and AC-LA8-FLY to suspend LA8 system from above. Only experienced rigging professionals should install the LA8 in a flown configuration. Available in silver.</p>
	<p><b>ST-PA-010</b> Pole mount adapter for Adaptive Technologies brackets. Use to adapt ST-MM-024, or ST-MM-120HD for use on a pole. Black only.</p>		

# SOUNDTUBE LA808i-II with LA880i-II


Line Array Speaker

## Graphs


Frequency Response

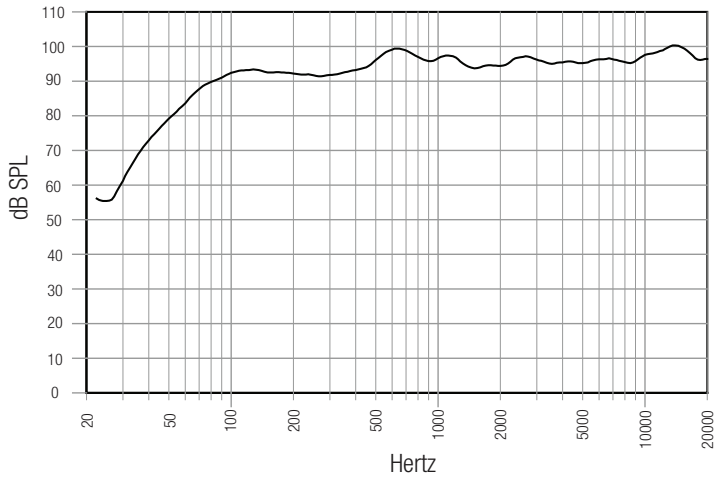


Phase/Impedance Response

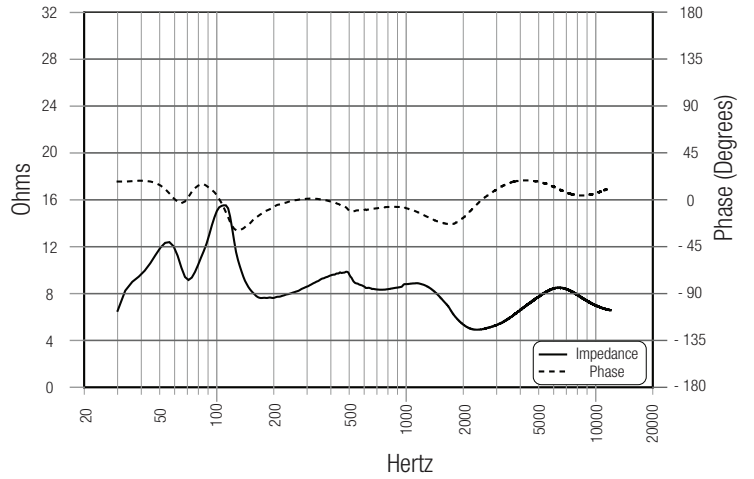


Vertical Beamwidth ( $\pm 6$  dB)

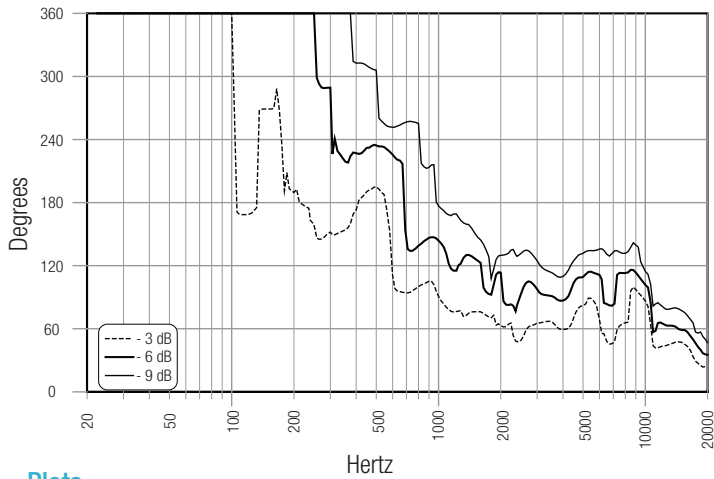

Directivity Index (DI)

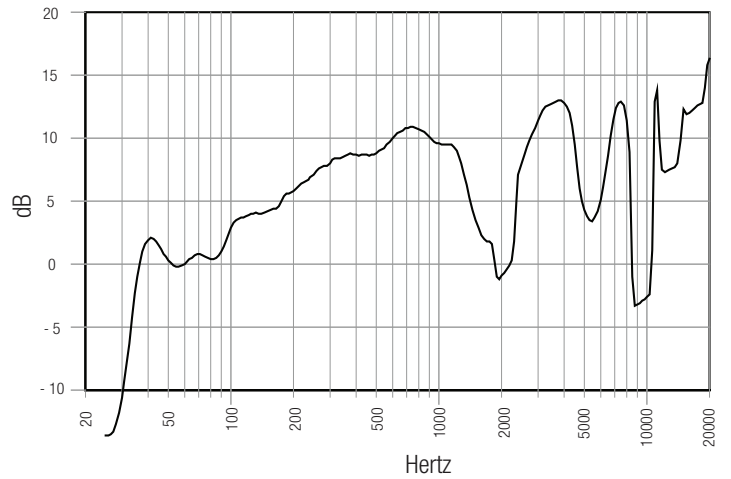

## Plots

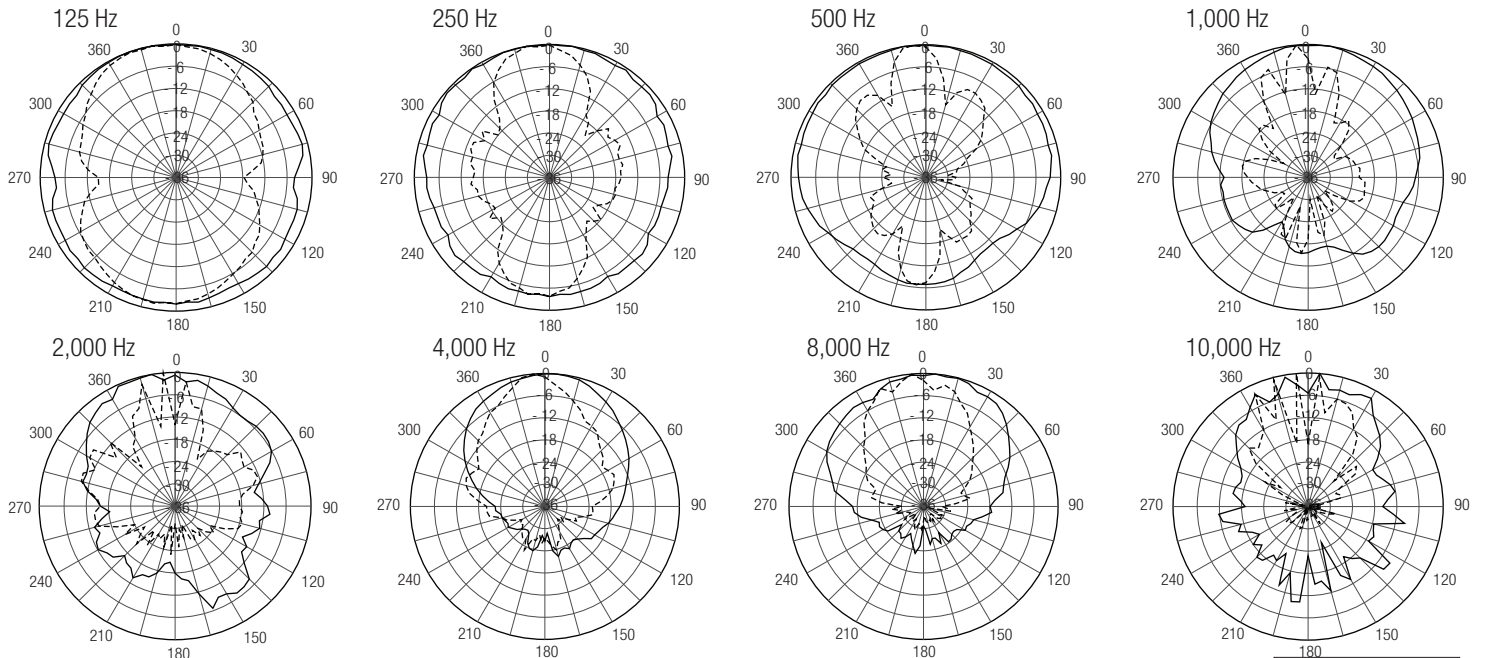

Technical data, EASE™ plots, SoundTubeSPEC™ software and product downloads available at [www.soundtube.com](http://www.soundtube.com)

----- Horizontal  
 \_\_\_\_\_ Vertical